



0,152
22,000
22,152 t
6,14 %
Fluß
0,04
6,10

	B/b	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	
Auftrieb	-0,098	-4,846	-8,957	-15,763	-23,916	-28,442	-30,934	-32,714	-33,921	-34,533	-34,445	-33,257	-30,192	-24,972	-16,158	-7,176	-0,306	
Gewicht	12,283	8,743	13,212	17,398	21,796	20,224	20,380	28,160	35,184	34,919	35,173	25,339	25,128	19,175	14,875	14,521	13,969	
Trim in tons	12,185	3,897	4,255	1,634	-2,119	-8,218	-10,554	-4,553	1,263	0,386	0,728	-7,918	-5,064	-5,796	-1,283	7,345	13,662	
cm / ton	0,4	5,3	1,7	1,9	0,7	-0,9	-3,6	-4,6	-2,0	0,6	0,2	0,3	-3,5	-2,2	-2,5	-0,6	3,2	6,0

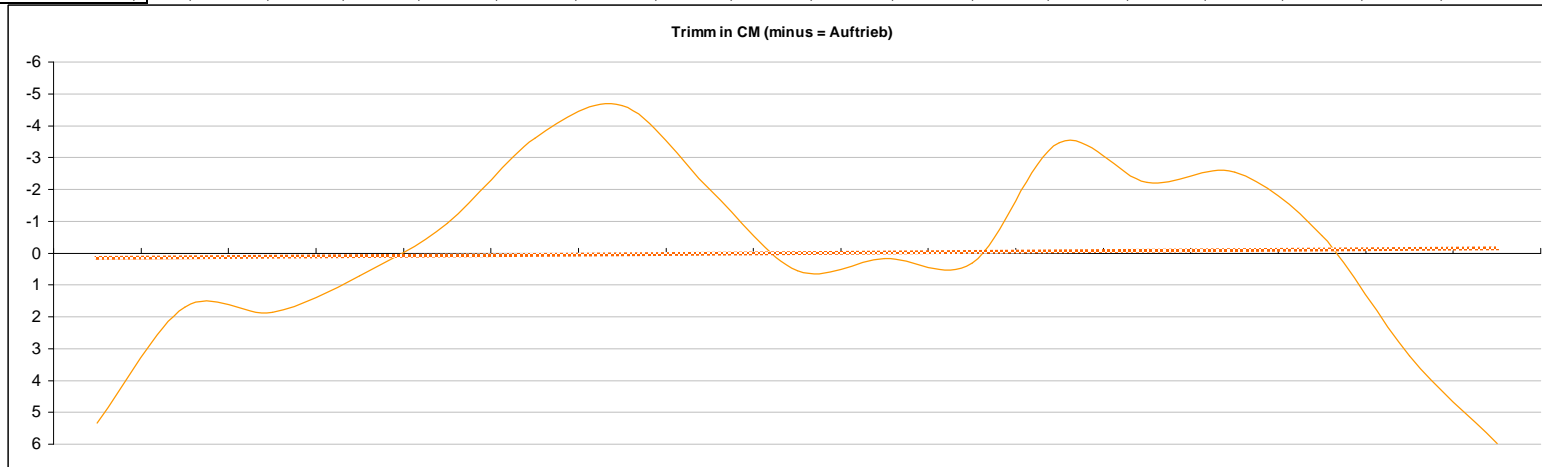

Zwischensumme nach "Laengs":	Gewicht Waende	3,100	3,147	3,660	3,306	2,955	2,774	2,714	2,635	2,665	2,640	2,652	2,743	3,054	4,195	2,613	3,451	1,976	0,053	50,332
Gewicht pro m2 und BEIDE Seiten																				
Aufkantung																				
bei 55mm:																				
bei 35 mm																				

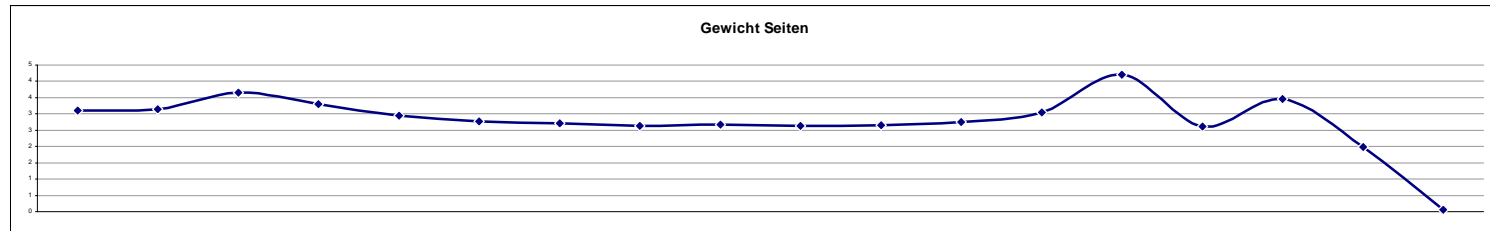

0,321
0,292
0,187